
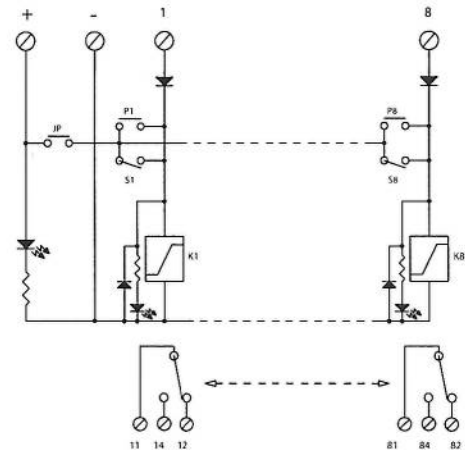


Stapel 1 Dinduy 10/7/2017

1 Contatto Scambio 12 A / 16 A - Ingresso con Test Relè

1 Changeover Contact 12 A / 16 A - With Push Button Test



⊗ Morsetti a vite / Screw Terminal Blocks

Dati tecnici

Specifications

Tensione ingresso	Input voltage	24 Vdc	24 Vdc
Corrente nominale	Nominal current	12A	16A
Corrente ingresso	Input current	30mA	30mA
Tensione max contatto	Max switching voltage	440Vac - 300Vdc	440Vac - 300Vdc
Carico max COS φ=1	Max load COS φ=1	12A 250Vac, 12A 24Vdc	16A 250Vac, 16A 24Vdc
Carico max COS φ=0,4	Max load COS φ=0,4	5A 250Vac, 5A 30Vdc	8A 250Vac, 8A 30Vdc
Carico min	Min load	100mA / 5Vdc	100mA / 5Vdc
Δt on	Δt on	7mSec.	7mSec.
Δt off	Δt off	2mSec.(dc)	2mSec.(dc)
Isolamento cont. bobina	Contact-coil insulation	5KVac	5KVac
Isolamento tra contatti	Insulation between contacts	1KVac	1KVac
Vita meccanica (relè)	Mechanical life (Relays)	20x10 ⁶ cicli / cycles	20x10 ⁶ cicli / cycles
Temperatura di funzionamento	Operating temperature	-25...50° C	
Allacciamento	Connection	Morsetti a vite / Screw terminal blocks	
Sezione cavi flessibili	Fine-wired section	max 1,5 mm ²	
Montaggio	Mounting	a scatto su profilo / Snap-in mounting on DIN TS32 TS35	

Comandi tramite Morsettiera
Commands using Terminal board

Relè Zoccolati
Socketed Relays

Relè Relays	Tipo Type	Codice Code	Dim. LxBxH (mm)
8	EMRS8ZP/24C	31E018700	128x82x57

Handwritten signature

EMRS...16... Relè 16 A / 16 A Relays

