

CEM-C20

Three-phase electrical energy meter with direct measurement, assembly on DIN rail



Description

Three-phase electrical energy meter for direct measurements of up to 65 A. Built-in LCD display (7 digits) with rotating screen system. Features an optical communication port (**OSC** system) on the side of the unit for installing the communication module (**CEM-M**). Also features 2 buttons (1 sealable button) for viewing all the measured information.

Other features include:

- **MID** certification, module B+D (depending on the type)
- Class 1 active energy (Class B, in accordance with **MID**), Class 2 reactive energy
- Complies with the **EN 50470 (MID)** European standards) or **IEC 62052-11** standards (international standards), depending on the type.
- Compact size (4 modules, 72 mm)
- Resettable partial meter
- 1 programmable impulse output, in accordance with **DIN 43864**
- Indicates bad connections on the screen
- Energy storage, even in the case of bad connections


Applications

- Redundant meter for verifying the energy allocated by the energy provider.
- Energy consumption report sent to a remote system (PLC/BMS).
- Cost control for achieving a high consumption/unit ratio in industrial processes.
- Display of electrical parameters (V, A, kW, kW-h, PF, etc.), per phase and three-phase.

Technical features

Power circuit	Rated voltage	230 Vac / 127 Vac, depending on the model
	Tolerance	± 20%
	Frequency	50...60 Hz
	Consumption	< 2 W / 10 VA
Voltage measurement circuit	Connection	Three-phase
	Reference voltage	3 x 127/220...3 x 230/400 Vac
	Frequency	50 / 60 Hz
	Self-consumption	< 2 W / 10 VA
Current measurement circuit	Nominal current I_n	5 A
	Maximum current	65 A
	Self-consumption	< 0.1% of I_n
Accuracy	Active Energy	Class B (EN 50470) Class 1 (IEC 62053-21)
	Reactive Energy	Class 2.0 (IEC 62053-23)
Impulse output	Type	Optocoupled
	Electrical features	max. 24 Vdc 50 mA
Environmental features	Operating temperature	-25 °C...+70 °C
	Relative humidity	5%...95% without condensation
Mechanical features	Protection degree	IP 51 installation / IP 40 terminals
	Dimensions	70 x 90 x 64 mm
	Weight	340 g
	Material	ABS + V0 self-extinguishing polycarbonate
	Standards	EN 50470-1, EN 50470-3, IEC 62052-11, IEC 62053-21, IEC 62053-23

OSC

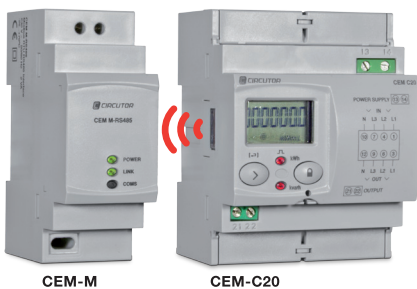




CEM-C20

Three-phase electrical energy meter with direct measurement, assembly on DIN rail

References

Type	Code	Parameters measured	Active	Reactive	MID certificate
CEM-C20-312	Q22312	V, A, kW, kWh, kvar, kvarh, PF	●	●	-
CEM-C20-312 MID	Q22314	V, A, kW, kWh, kvar, kvarh, PF	●	●	●

Dimensions

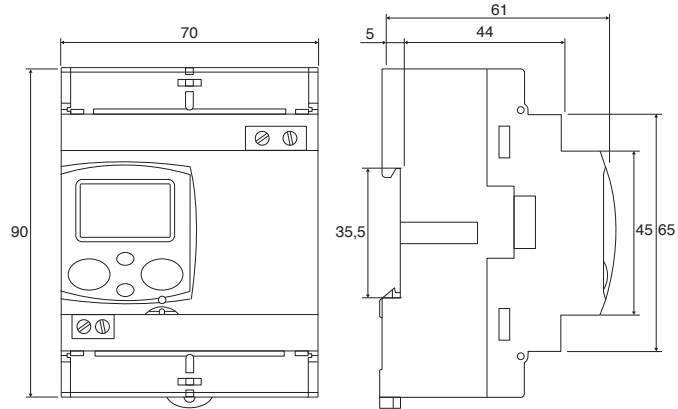

Connections

