

Contact Details


Before using the product, please check the guide pages at the front of this catalog.

Internet

<http://www.daikinpmc.com/en/>

For latest information, PDF catalogs and operation manuals

Low-watt Type Solenoid Valve

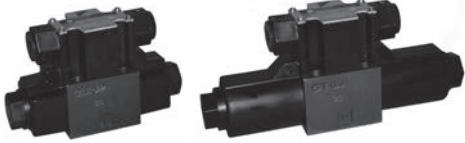

For AC power supply

For DC power supply

Features

- These solenoid valves use low-wattage type coils (DC: 5 W, AC: 12 W).
- The low current specification allows this valve to be driven directly with a PLC (programmable logic controller)

Nomenclature

※	-	LS	-	G	O2	-	※※	※	※	-	30	-	※※※
1		2		3	4		5	6	7		8		9

M12-4-pin connector specifications

LS	-	G	O2	-	※※	※	P	-	30	-	D	3B	
		2		3	4		5	6	7		8	10	11

1 Applicable fluid code

No designation: Petroleum-based hydraulic fluid
F: Phosphate ester hydraulic fluid

2 Model No.

LS: Low-wattage type solenoid valve

3 Connections

G: Gasket mount type

4 Nominal diameter

O2: ¼

5 Spool type (See the model table)

6 Spool operating method (See the model table)

C: Spring center type
A: Spring offset type (with A solenoid)
B: Spring offset type (with B solenoid)
N: No-spring type (without detent)
D: No-spring type (with detent)

7 Voltage code

(See the solenoid specification table)

8 Design No.

(The design No. is subject to change)

9 Option code (See the option code table)

10 Connector code

D: M12-4-pin connector specifications

11 Connector connecting method

3B: Load side: Negative common
Wiring port: Outlet at port B side

Note: With M12-4-pin connector specifications, only 2C, 4C, 2B and 2D can be designated for 5 Spool type and 6 Spool operating method.

Specifications

Model No.	Nominal diameter	Maximum operating pressure MPa {kgf/cm ² }	Maximum flow rate *1 L/min	Permissible back pressure MPa {kgf/cm ² }	Maximum switching frequency Times per minute
LS-G02-※※※※-30	¼	7 {70}	30	7 {70}	240
LS-G02-※※※※-30-※W		16 {160}		12 (AC) {120}	
LS-G02-※※※※-30-D3B		7 {70}		14 (DC) {140}	
				7 {70}	120

Note: *1 The maximum flow rate is 15 L/min when 66C is designated for the spool type and spool operating method.

7 : Solenoid specification table

Voltage code	Power supply voltage	Starting current A	Holding current A	Holding power W	Permissible voltage fluctuation (%)
A	AC 100 V (50 Hz)	1.13	0.32	12.0	80 to 110
	AC 100 V (60 Hz)	1.02	0.22	8.5	90 to 121
	AC 110 V (60 Hz)	1.13	0.26	11.2	82 to 110
B	AC 200 V (50 Hz)	0.57	0.16	12.0	80 to 110
	AC 200 V (60 Hz)	0.51	0.11	8.5	90 to 121
	AC 220 V (60 Hz)	0.57	0.13	11.2	82 to 110
P	DC 24 V	-	0.216	5.2	90 to 110

Time rating	Insulation resistance	Withstand voltage	Insulation type
Continuous	50 MΩ	AC 1500 V, 1 minute	Type B (Coils: AC: H class, DC: F class)

Note: ○ The electric current and power indicated are the values at 20°C.

○ The starting current is the value required to operate the solenoid with the movable core at the furthest position from the stationary core.

Contact Details























Before using the product, please check the guide pages at the front of this catalog.

Internet

<http://www.daikinpmc.com/en/>

For latest information, PDF catalogs and operation manuals

5 6 : Model table

Model code JIS graphic symbols for hydraulic system			Power supply	Pressure - Flow rate characteristics (See the graphs)			Pressure drop characteristics (See the graphs)		
Spool type and spool operating method									
Type C, N, D	Type A	Type B							
LS-G02-2C *2 	-	-	AC	A	a	a	(3)	(5)	-
			DC	D F	b c	b c			
LS-G02-3C 	-	-	AC	A	A	A	(4)	(3)	(3)
			DC	A	A	A			
LS-G02-4C*2 	-	-	AC	B	a	a	(3)	(6)	-
			DC	E G	b c	b c			
LS-G02-44C 	-	-	AC	B	a	a	(2)	(5)	-
			DC	E G	b c	b c			
LS-G02-66C 	-	-	AC	C	e	e	(1)	(1)	(3)
			DC	C	e	e			
LS-G02-7C 	-	-	AC	A	g	g	(6)	(5)	-
			DC	A	g	g			
LS-G02-8C 	-	-	AC	B	a	a	(3)	(5)	-
			DC	G	c	c	(3)	(3)	-
LS-G02-9C 	-	-	AC	A	g	a	(5)	(3)	-
			DC	G	g	c	(3)	(3)	-
-	LS-G02-2A 	-	AC	A	A	f	(5)	(5)	-
			DC	A	h	f			
-	LS-G02-20A 	-	AC	-	A	f	(4)	-	-
			DC	-	h	f			
-	-	LS-G02-2B *2 	AC	A	f	A	(5)	(5)	-
			DC	A	f	h			
-	-	LS-G02-20B 	AC	-	f	A	(4)	-	-
			DC	-	f	h			
LS-G02-2N 	-	-	AC	A	d	d	(3)	(5)	-
			DC	A	d	d			
LS-G02-20N 	-	-	AC	-	d	d	(5)	-	-
			DC	-	d	d			
LS-G02-2D*2 	-	-	AC	A	d	d	(5)	(3)	-
			DC	A	d	d			
LS-G02-20D 	-	-	AC	-	d	d	(5)	-	-
			DC	-	d	d			

Note: *2 With M12-4-pin connector specifications, only 2C, 4C, 2B and 2D can be designated.

9 : Option code table

Option code	Option details				Notes	
No designation	Terminal box type	With lamp	Without earth terminal	Without surge killer		
N					With surge killer	
NR					With surge killer (with resistance)	*3
E	DIN connector type	Without lamp	With earth terminal	Without surge killer	*4	
C					CE standard compliant	*5
CL					Without surge killer	*5
CLE	Without DIN connector socket	With lamp	With earth terminal	Without surge killer	*4, 5	
C1					CE standard compliant	*5
W	High-pressure model (maximum operating pressure: 16 MPa)				*6	

○ If two or more options are selected, sort the option codes in alphanumeric order.

Note: *3 The specifications with surge killer (with resistance) are only applicable to voltage code P.

*4 Only voltage codes A and P can be designated for CE compliant products (option code: E, EN, ENR).

Only voltage code A can be designated for CE compliant products (option code: CE, CLE) (Voltage codes other than A and P are not compliant with the CE standards.)

*5 The DIN connector type is only applicable to voltage codes A and B.

*6 The high-pressure model can only be used when the spool model/spool operating method is other than 44C.

Contact Details

Before using the product, please check the guide pages at the front of this catalog.





Internet

<http://www.daikinpmc.com/en/>


For latest information, PDF catalogs and operation manuals

Performance curves (viscosity: 32 mm²/s {cSt})

Pressure - Flow rate characteristics

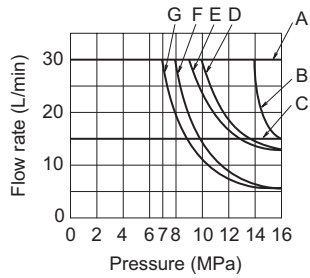

Pressure drop characteristics

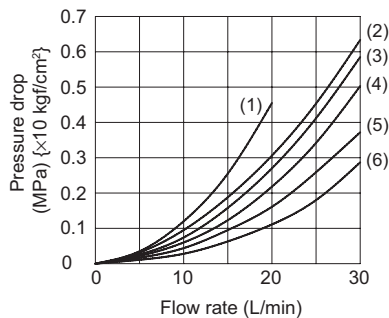

Note: ○ The flow rates shown in the graphs are the maximum flow rates under which operation (switching) of the valve is possible under the following conditions.

AC	After rising to the saturation temperature, 90% of rated voltage applied (60 Hz)
DC	After rising to the saturation temperature, 90% of rated voltage applied

○ In the 5 model table, the conditions for each of the values given in the two rows for DC power supply are as follows.

Top row: After rising to the saturation temperature, 100% of rated voltage applied

Bottom row: After rising to the saturation temperature, 90% of rated voltage applied

Operation time (Sec.)

Power supply	Applicable wiring method	Operating direction	Operation time
AC	Terminal box type DIN connector type	Energize	0.01 to 0.03
		Spring return	0.01 to 0.05
DC	Terminal box type	Energize	0.01 to 0.08
		Spring return	0.02 to 0.04
	M12-4-pin connector type	Energize	0.01 to 0.08
		Spring return	0.05 to 0.12

Mass (kg)

Double solenoid		Single solenoid	
AC	DC	AC	DC
1.5	2.2	1.3	1.6

Note: ○ The operation time may change slightly depending on the spool code, conditions of use (pressure, flow rate, hydraulic fluid viscosity, etc.).

○ Solenoid valves with M12-4-pin connector specifications incorporate a diode to absorb surge current. Therefore there will be a slight delay in the operation time at spring return when compared to terminal box type/DIN connector type solenoid valves.

Sub-plate model code

● The sub-plate is not provided with the valve. Order it separately if required by specifying the model code given in the table below.

Model code	Nominal diameter	Connection port diameter	Mass kg
JS-01M02	1/4	Rc1/4	0.64

Refer to Page S-8 for the dimensions of the sub-plate.

Mounting bolt

Hexagon socket head cap bolt	Quantity	Tightening torque N·m {kgf·cm}
M5 × 45	4	6 to 8 {60 to 80}

Note: LS-G02 is not provided with mounting bolts.

Contact Details

Before using the product, please check the guide pages at the front of this catalog.

Internet

<http://www.daikinpmc.com/en/>

For latest information, PDF catalogs and operation manuals

Solenoid model codes

Power supply	Applicable wiring method	Model code of solenoid set	Model code of solenoid coil
AC	Terminal box type	LA-2*-30	C-LA-2*-30
	DIN connector type	LA-2*-C1-30	C-LA-2*-C1-30
DC	Terminal box type	LD-2P-30 or LD-2P-W-30 *7	C-LD-2P-30
	M12-4-pin connector type	LD-2P-30	C-LD-2P-30

Note: *6 *: Voltage code (See [7]: Solenoid specification table.)

*7 The solenoid model code for DC type with high-pressure specifications (option code "W") is LD-2P-W-30.

- The solenoid set comprises a solenoid coil, a solenoid cartridge, a plastic nut, and a push pin.
- DIN connector type solenoid sets and solenoid coils are not provided with a DIN connector socket.
- When a DIN connector socket is required, order it from your nearest distributor, specifying the model code given in the table below.
Manufacturer: Hirschmann

Model code	Power supply voltage	Details	
GDM2011		Without lamp	Without surge killer
GDML2011-LG110-H0	AC 100 V, AC 110 V	With lamp	
GDML2011-LG240-H0	AC 200 V, AC 220 V		
GDML2011-LG110/Z-H0	AC 100 V, AC 110 V		With surge killer
GDML2011-LG220/Z-H0	AC 200 V, AC 220 V		

Terminal box model code

Terminal box type

Voltage code	Spool operating method: Type C, N or D		Spool operating method: Type A		Spool operating method: Type B	
	Without surge killer	With surge killer	Without surge killer	With surge killer	Without surge killer	With surge killer
A	TLW2-AB (1)	TLW2-A-N (2)	TLSA2-AB (1)	TLSA2-A-N (2)	TLSB2-AB (1)	TLSB2-A-N (2)
B		TLW2-B-N (2)		TLSA2-B-N (2)		TLSB2-B-N (2)
P	TLW2-NP (3)	TLW2-NP-N (4)	TLSA2-NP (3)	TLSA2-NP-N (4)	TLSB2-NP (3)	TLSB2-NP-N (4)
		TLW2-NP-NR (5)		TLSA2-NP-NR (5)		TLSB2-NP-NR (5)






M12-4-pin connector type


Voltage code	Spool operating method: Type C, N or D	Spool operating method: Type A	Spool operating method: Type B
P	TLW2-NP-D3BPG-M12 (6)	TLSA2-NP-D3BPG-M12 (6)	TLSB2-NP-D3BPG-M12 (6)

Note: ○ The number next to each model code indicates the type of the electrical circuit. (See the electrical circuits section for details.)

Electrical circuits

(terminal box type: (1), (4), (5), DIN connector type: (1), (3), M12-4-pin connector type: (6))

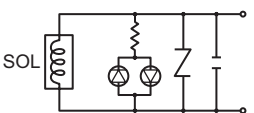AC 100 V minimum DC 100 V minimum	AC 100 V minimum With surge killer	DC 24 V	DC 24 V With surge killer	DC 24 V With surge killer (with resistance)
(1) 	(2) 	(3) 	(4) 	(5) 

DC 24 V With diode
(6) 

Note: ○ When switching a DC solenoid valve with a surge killer through an electromagnetic relay, the reverse surge voltage is suppressed by the varistor and sparks between relay contacts are suppressed by the capacitor at demagnetization of the solenoid.

Standard solenoid valves with a surge killer (option code "N") are very effective to eliminate sparks. However, adequate consideration should be given to the service life of the relay to avoid contact welding due to inrush current at solenoid excitation.

In applications where contact welding due to inrush current is expected, solenoid valves with a surge killer (with resistance) (option code "NR") are effective. Note, however, they are not as effective as standard solenoid valves with a surge killer (option code "N") in terms of elimination of sparks.

- When using solenoid valves without a surge killer, adequate consideration should be given to protection against the reverse surge voltage generated at demagnetization of the solenoid. (It is advisable to incorporate a surge absorbing element such as a varistor in the circuit.)
- Be careful about the polarity (+/-) when wiring the terminal box (6) for the M12-4-pin connector type. Carrying current with miswiring will cause short-circuit current to flow into the built-in diode and damage the diode and drive circuit.

Contact Details

Before using the product, please check the guide pages at the front of this catalog.

Internet

<http://www.daikinpmc.com/en/>


For latest information, PDF catalogs and operation manuals

Wiring guide


The figure shows the status with the terminal box nameplate removed.

- The earth terminal is optional (option code: E).
- Always turn off the power supply before starting wiring work.
- Use crimp-style terminals for M3.
- For double solenoid type valves, a short bar for common terminals is fitted to facilitate wiring. Connection to either terminal (3) or (4) is sufficient.
- Tighten the terminal screws (M3) at a tightening torque of 0.34 to 0.51 N·m {3.4 to 5.1 kgf·cm}
- There is no polarity even with DC solenoid valves.


Spool operating method: Type C, N or D
[Terminal box type]

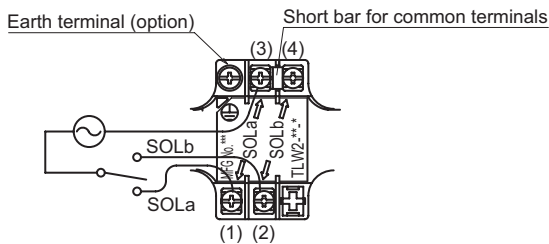


Spool operating method: Type A
[Terminal box type]



Spool operating method: Type B
[Terminal box type]




Spool operating method: Type C, N, D, A, B
[DIN connector type]

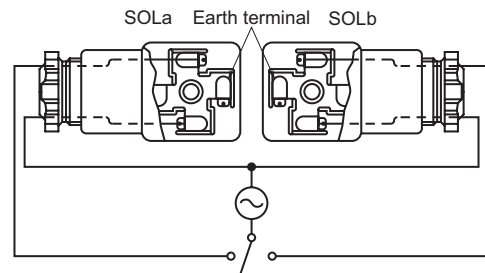

- Be careful about the polarity (+/-) when connecting the wiring to the M12-4-pin connector type solenoid valve. Carrying current with miswiring will cause short-circuit current to flow into the built-in diode and damage the diode and drive circuit.


M12-4-pin connector type

M12-4-pin connector pin-out



- M12-4-pin connector pin-out
- (1) DC 24 V (brown) (3) OV (blue)
- (2) SOL b (white) (4) SOL a (black)

Connector wiring schematic

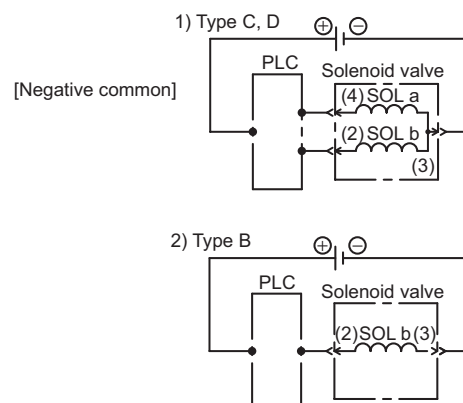

Contact Details

Before using the product, please check the guide pages at the front of this catalog.

Internet


<http://www.daikinpmc.com/en/>

For latest information, PDF catalogs and operation manuals


External dimension diagram

■ DIN connector type


- Double solenoid [Type C, N, D]
[AC solenoid]

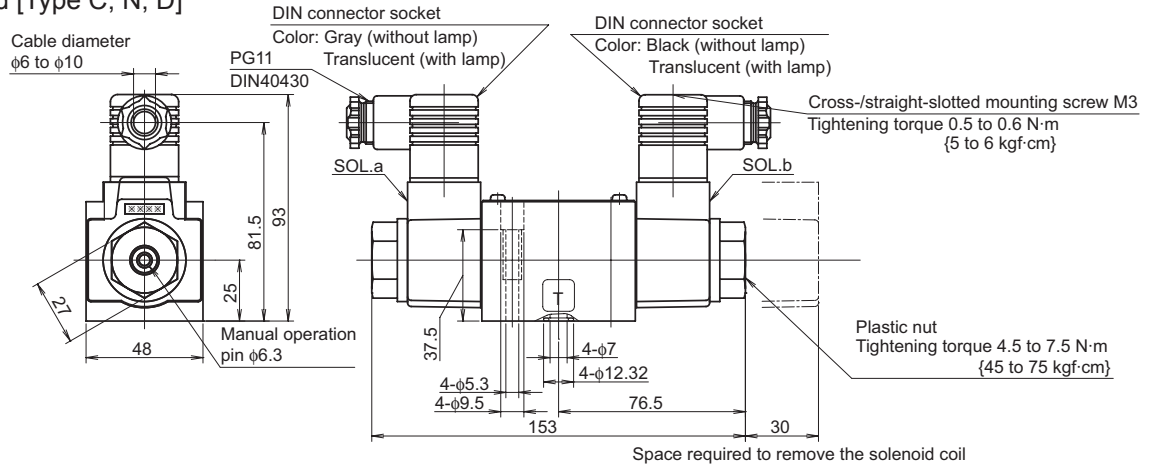


- Single solenoid [Type A]
[AC solenoid]

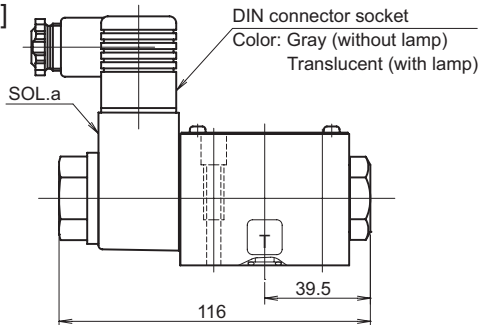


- Single solenoid [Type B]
[AC solenoid]

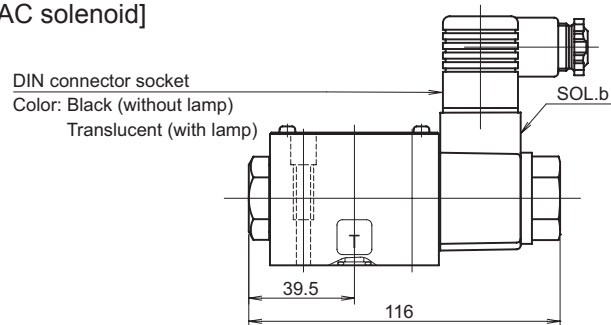

- M12-4-pin connector specifications

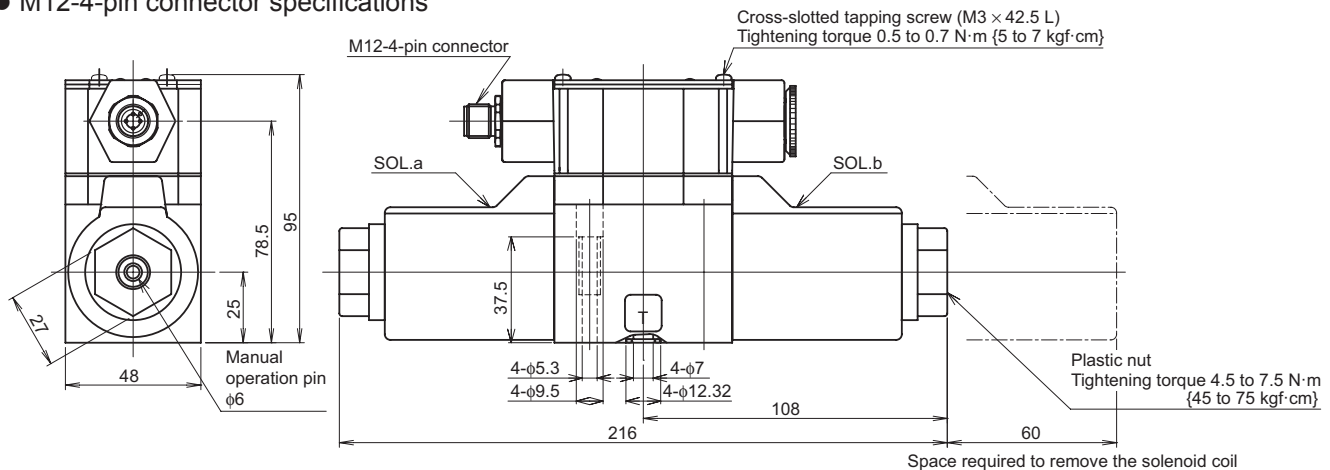

- Single solenoid [Type B]
[DC solenoid]

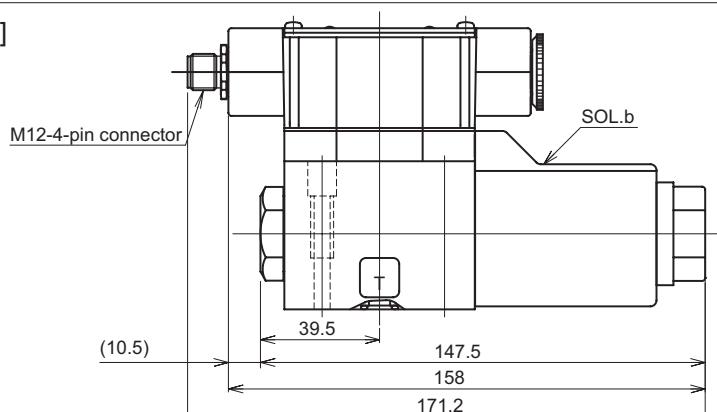

Contact Details

Before using the product, please check the guide pages at the front of this catalog.

Internet


<http://www.daikinpmc.com/en/>

For latest information, PDF catalogs and operation manuals

Sectional structural diagram

LS-G02

(Terminal box type)

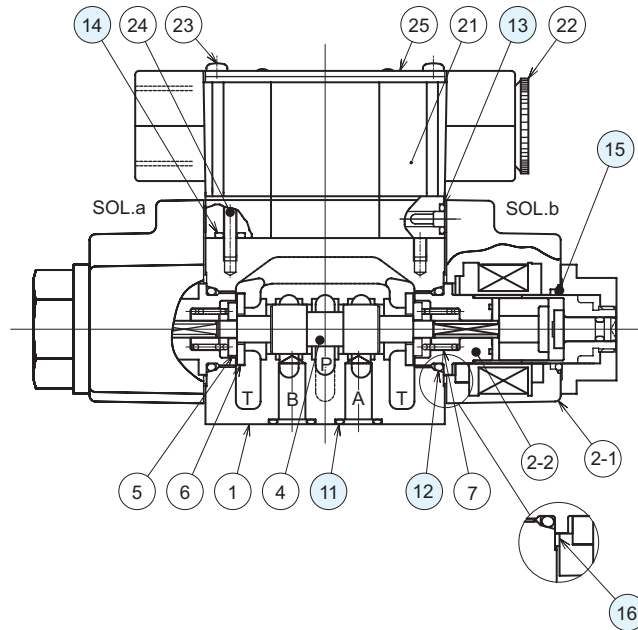


Sealing part table

Part No.	Name	Quantity		Part specifications
		AC	DC	
11	O-ring	4	4	AS568-012 (NBR, Hs90)
12	O-ring	2	2	JIS B 2401 1B P18
13	O-ring	4	4	JIS B 2401 1A P4
14	O-ring	3	3	JIS B 2401 1A P5
15	O-ring	2	-	JIS B 2401 1A P18
		-	2	JIS B 2401 1A P16
16	Sheet packing	2	-	NBR, Hs65
	O-ring	-	2	AS568-021 (NBR, Hs70)

LS-G02

(M12-4-pin connector specifications)

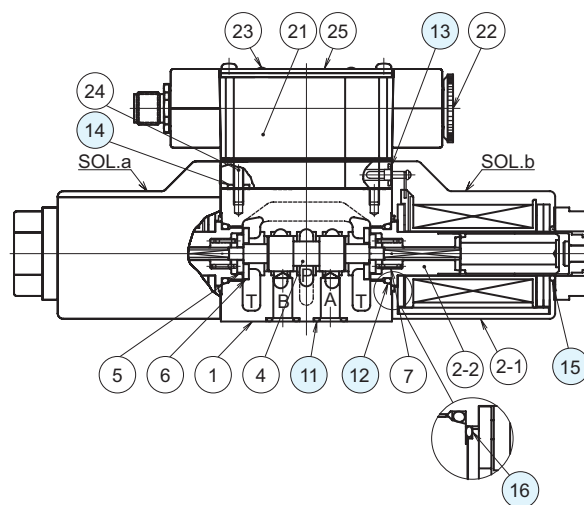

Sealing part table

Part No.	Name	Quantity	Part specifications
11	O-ring	4	AS568-012 (NBR, Hs90)
12	O-ring	2	JIB B 2401 1B P18
13	O-ring	4	JIB B 2401 1A P4
14	O-ring	3	JIB B 2401 1A P5
15	O-ring	2	JIB B 2401 1A P16
16	Sheet packing	2	AS568-021 (NBR, Hs70)