



TFOCA-II® 4-Channel Connector

About the TFOCA-II® Connector

In 1999, AFSI designed the “next generation” deployable fiber optic connector for the emerging “knowledge-centric warfare communication” requirements of the future battlefield. With this new product, a tactical, deployable fiber optic connector, the TFOCA-II® family of connectors was born, becoming an enabling technology for the digital battlefield.

The heart of the TFOCA-II® family of deployable fiber optic connectors centers on the TFOCA-II® sealed free-floating termini. The robust termini design enables TFOCA-II® connectors to seal against high humidity and moisture conditions while allowing full axial and orbital movement of the mated termini, providing low insertion loss and minimal back reflection.

AFSI designed its patented TFOCA-II® connectors to survive the harshest battlefield conditions imaginable. As a result, the US ARMY WIN-T program selected TFOCA-II® as the standard “next generation” fiber optic connector for military tactical deployable networks. The AFSI TFOCA-II® has also been adopted as the baseline design that DSCC (Defense Supply Center, Columbus) is utilizing in drafting the MIL-DTL-83526/16 and/17 connector specifications.

How to Order

For more information on how to order or to obtain a price quote on our TFOCA-II® product line, call toll free (US only) at 800.472.4225,

international calls please use 1.214.547.2400 or e-mail sales@fibersystems.com.

Features & Benefits

- **Hermaphroditic Design for Versatility** - Enables multiple TFOCA-II® plug assemblies to be concatenated
- **Removable End Cap** - Allows for easy field maintenance and cleaning
- **4-Channel Connector Design** - Two fold improvement over TFOCA with better optical performance
- **Improved Cable Retention Strength** - Designed to meet 400 lb pull strength while protecting fibers from stress
- **Zn-Ni Plating** - Provides substantial longevity to corrosive environments. Meets new mandate set by the Environmental Protection Agency for elimination of heavy metal plating
- **Commercial Ceramic Ferrule Technology** - Enables TFOCA-II® connector to provision multimode and single mode interconnect with a variety of polishes including SPC and UPC
- **Solid Core Alignment Sleeves** - More robust than split alignment sleeves
- **Hermaphroditic Dust Cap** - Plug and/or receptacle dust caps connect together to prevent dust and moisture penetration during deployable conditions
- **Optional Key Positions** - Four key positions (1, 2, 3 and universal) available, enabling segregation of mated plug/receptacles or plug/plug, through mechanical interface
- **Field Repairable Using Existing Parts** - Additional connector components (other than termini) are not required to perform field repair
- **Also Available in Stainless Steel and Brass** - Allows the connector to be used in a variety of applications


Applications

- US Army, Navy and Marine Corp military tactical deployments
- Oil, Gas and Geoscience industries
- Mining
- Industrial
- Broadcast


TFOCA-II® 4-Channel Connector Specifications

Parameter	Typical	Maximum
Insertion Loss (Multimode)	0.30dB	0.75dB
Insertion Loss (Single Mode)	0.40dB	0.75dB
Back Reflection (Single Mode-UPC Polish)	-50dB	-40dB
Operating Temperature	-46° C to + 71° C	
Storage Temperature	-52° C to + 85° C	
Mud	5 minute immersion, clean with water (per MIL-C-83526/12 /13 requirements)	
Water Pressure	MIL-STD-810, Method 512.4, 1m, 48 hr	
Ice Crush	DOD-STD-1678, Method 4050	
Humidity	DOD-STD-1678, Method 4030, 10 cycles	
Flammability	MIL-STD-1344, Method 1012	
Vibration (Operational)	MIL-STD-1344, Method 2500.1	
Shock	EIA/TIA-455-14, Condition A	
Mating Durability	2,000 cycles per EIA/TIA-455-21	
Cable Seal Flexing	100 cycles per MIL-STD-1344, Method 2017, Procedure 1	
Twist	1,000 cycles per EIA/TIA-455-36	
Cable Retention	400 lb min per EIA/TIA-455-6, 1hr (plug & strain relief receptacles)	
Impact	EIA/TIA-455-2	
Crush Resistance	450 lb minimum per EIA/TIA-455-26	
EMI Shielding Effectiveness (Receptacle Only)	> 60dB, 15KHz to 10GHz	
Corrosion Resistance	MIL-STD-1344, Method 1001, Condition A	



FS4H1000 TFOCA-II® Plug

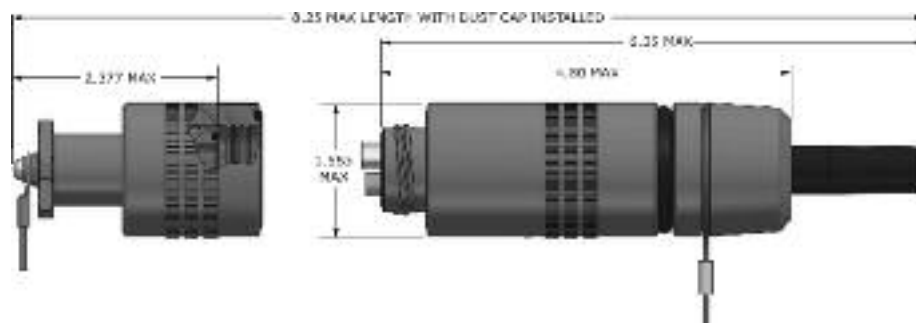



FS4H1090 TFOCA-II® 90° Plug

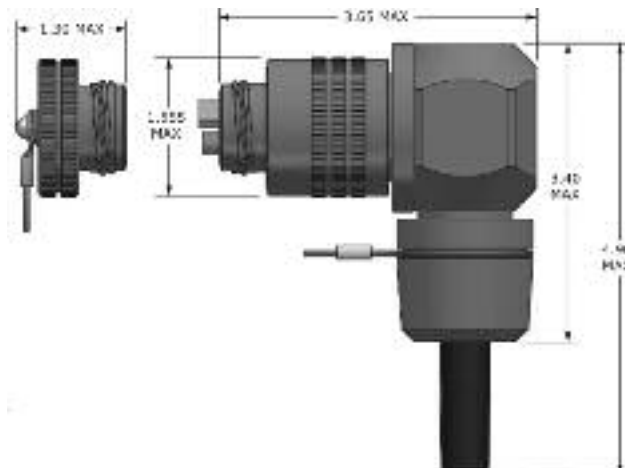



FS4H6000 TFOCA-II® Flange Mount Receptacle (External Mount)

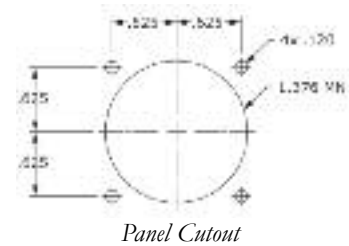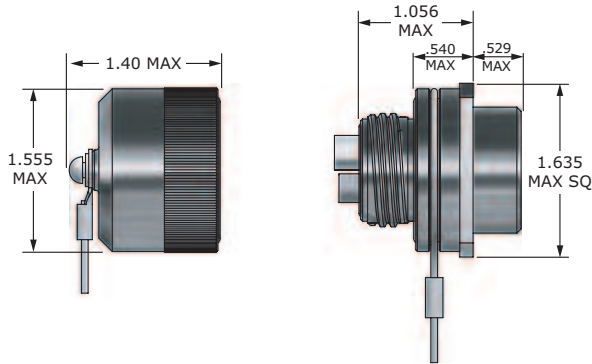


FS4H6080 TFOCA-II® Flange Mount Receptacle (Internal Mount)

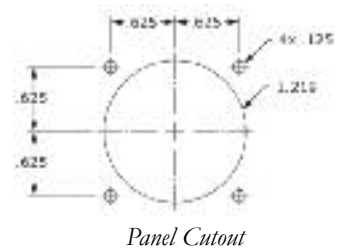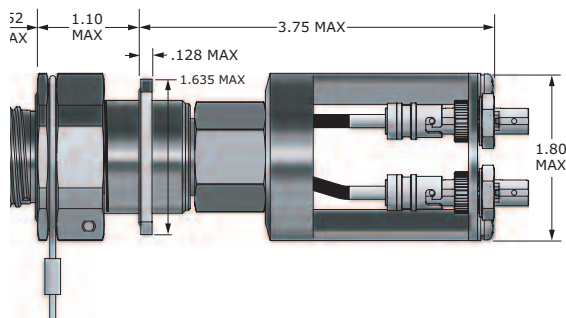


FS4H6200 TFOCA-II® Flange Mount Strain Relief Receptacle (SRR) (External Mount)

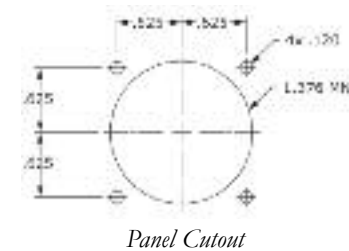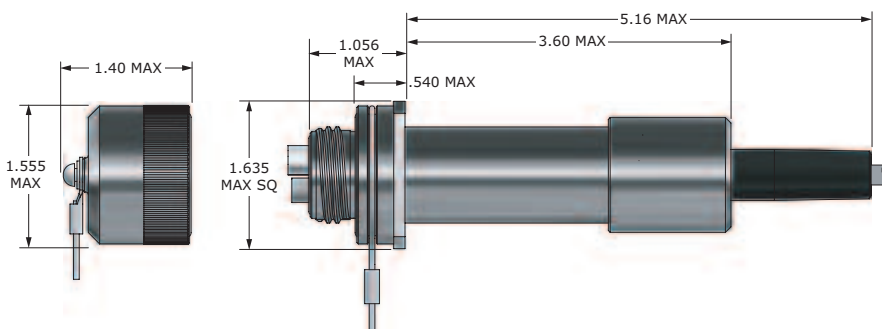


FS4H8280 TFOCA-II® Jam Nut Strain Relief Receptacle (SRR) (Internal Mount)

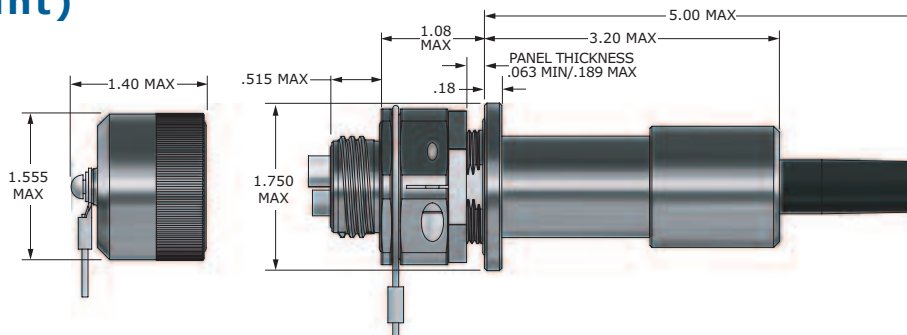


FS4H8080 TFOCA-II® Jam Nut Receptacle (Internal Mount)

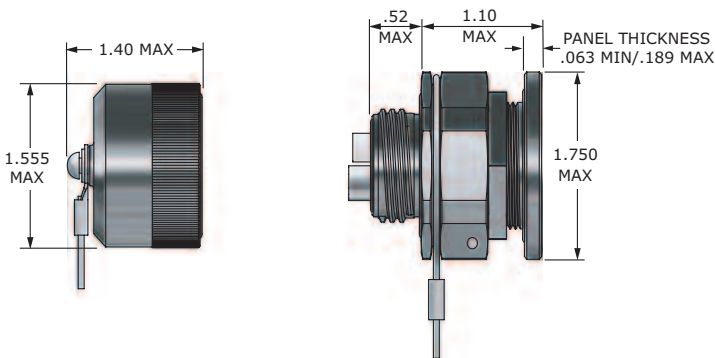

Panel Cutout (Dimensions are the same for FS4H8000, FS4H8080 & FS4H8280)

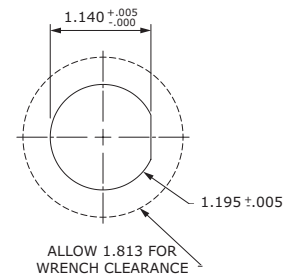

FS4H8000 TFOCA-II® Jam Nut Receptacle (External Mount)

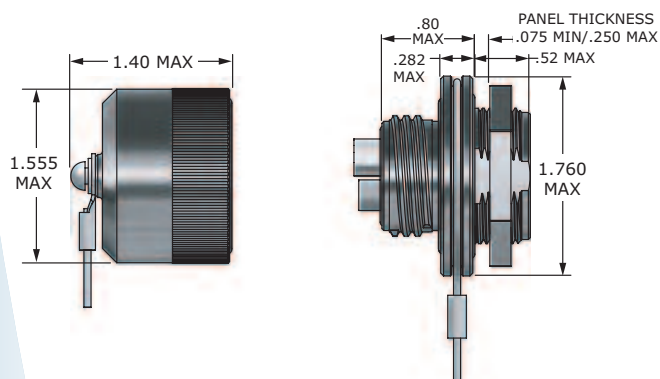

About Amphenol Fiber Systems International

Amphenol Fiber Systems International (AFSI) designs, manufactures, markets and supports reliable and innovative fiber optic interconnect solutions that withstand the harsh environments of military, oil & gas, mining and broadcast applications. After more than a decade in business, AFSI continues to uphold its position as a global leader in fiber optic interconnect components and systems such as termini, M28876, MIL-ST, TFOCA and the TFOCA-II® connector, which AFSI developed and patented.

AFSI has delivered millions of fiber optic connectors worldwide. Whenever there is a need for superior, cost-effective fiber optic systems and products that will stand up to demanding operating environments, you can rely on AFSI for engineering know-how, top-quality products and expert technical support.

For more information about AFSI, visit www.fiber-systems.com.