

RECTANGULAR CONNECTORS—RC2 (300 PSI)

The materials of construction of these connectors are stainless steel tubing cemented into anodized aluminum blocks. They have a caged “O” ring gasket design that seals when connected.


Available colors: CLR (clear), GLD (gold), BLK (black), RED, GRN (green), and BLU (blue). If color is not specified, Scanivalve will supply a color based on availability.

Tubulation sizes available: .031 (no bulge), .040, .063 and .125 inches O.D.

No. of Tubes	Connector Length L Inches (mm)	
	For Tube Diameters	
	.031, .040, .063	.125
8	1.700 (43.2)	2.875 (73.0)
10	1.950 (49.5)	3.375 (85.7)
12	2.200 (55.9)	3.875 (98.4)



Caged O-Ring Type Gasket

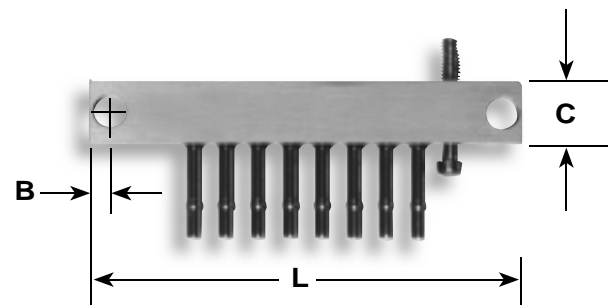

Dimensions Inches (mm)						
Tube Diameter*	Thickness	B	C	E Hole Diameter	F	G
.031						
.040	.125	.087	.250	.125	20300-02	No. 4 Mounting Screw
.063	(3.18)	(2.21)	(6.35)	(3.18)		
.125	.250	.160	.325	.140	20300-06	No. 6 Mounting Screw
	(6.35)	(4.06)	(9.53)	(3.56)		

* Each half of the connector can have a different tubulation size.

To order, specify: Two (2) each RC2 connectors plus a gasket are required to make one connector assembly.

ScanCo # RC2/ - 040 - 10 (GLD)
 Model Type _____ Color
 Tubulation _____ No. of Tubes
 Diameter _____ (8-10-12)
 .031,.040, .063 or .125

ScanCo # RC2/040 - G - 10
 Model Type _____ Tubulation Diameter Gasket No. of Tubes