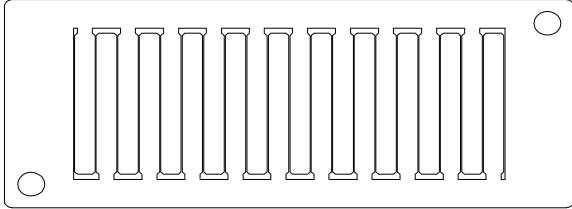


<b>DATA SHEET</b> <b>DS/216</b>	<b>PRINT SYSTEM</b> <b>TAGS FOR CABLES</b>				DATE: 5/29/2006	
<b>DRAWING</b>						
						
<b>REFERENCE ITEM CODE</b>						
SI2K02W/30 - SI2K02Y/30						
<b>PHYSICAL PROPERTIES</b>			<b>W SERIES</b>		<b>Y SERIES</b>	
COLOR			WHITE		YELLOW	
MATERIAL			PC/ABS			
OPERATIVE TEMPERATURE			- 50 ÷ +80 °C (-58 ÷ +176 °F)			
SELF-EXTINGUISHABILITY			VO Class (UL - 94)			
TOXIN FREE			PCB - PCT - PBB -PBDO - VC (press. 1ppm) - ROHS compliant			
ACID RESISTANT			☺			
WATERPROOF			☺			
OIL RESISTANT			☺			
DUST RESISTANT			☺			
<b>ITEM CODE</b>	<b>Tag length</b>	<b>Number of characters printable</b>	<b>Tags per box</b>	<b>Modules per box</b>	<b>Tags per module</b>	
SI2K02W/30 - SI2K02Y/30	30	17 / 18 (**)	600	30	20	
<b>NOTES:</b> (*) Standard character - ARIAL Normal, height 7 ; (**) Standard character - ARIAL Normal, height 6						
<b>Document Number</b>	<b>APPR. BY:</b>	<b>DATE:</b>	<b>REVISION SUBJECT</b>		<b>PAGES</b>	
78-8127-9048-9					1 of 1	