


# FLAT APPLICATORS

# DESIGNNETICS®


1624 S. Eber Road, Holland, Ohio 43528  
Phone 419-866-0700 Fax 419-866-0767

PRODUCT NUMBER	DIMENSION (A)		DIMENSION (B)		FLOW HOLE (C)	FELT TYPE	RESTRICTOR
23CC	0.433"	(11.0mm)	0.125"	(3.2mm)	-	04	-
23CD	0.433"	(11.0mm)	0.125"	(3.2mm)	-	04	20A
23AR	0.500"	(12.7mm)	0.125"	(3.2mm)	-	04	-
23AS	0.500"	(12.7mm)	0.125"	(3.2mm)	-	04	20A
23K	0.500"	(12.7mm)	0.125"	(3.2mm)	-	20	-
23L	0.500"	(12.7mm)	0.125"	(3.2mm)	-	20	20A
23CE	0.500"	(12.7mm)	0.125"	(3.2mm)	-	20	(1)-20Q
23CF	0.500"	(12.7mm)	0.125"	(3.2mm)	-	20	(1)-20Q, (1)-20A
23AA	0.500"	(12.7mm)	0.197"	(5.0mm)	-	01	-
23AB	0.500"	(12.7mm)	0.197"	(5.0mm)	-	01	20A
23AE	0.500"	(12.7mm)	0.236"	(6.0mm)	0.025" (.625mm)	01	-
23AF	0.500"	(12.7mm)	0.236"	(6.0mm)	0.025" (.625mm)	01	20A
47Ai	0.562"	(14.3mm)	0.125"	(3.2mm)	-	04	-
47Aj	0.562"	(14.3mm)	0.125"	(3.2mm)	-	04	20A
47P	0.562"	(14.3mm)	0.125"	(3.2mm)	-	20	-
47Q	0.562"	(14.3mm)	0.125"	(3.2mm)	-	20	20A
47A	0.625"	(15.9mm)	0.125"	(3.2mm)	-	01	-
47B	0.625"	(15.9mm)	0.125"	(3.2mm)	-	01	20A
47I	0.625"	(15.9mm)	0.125"	(3.2mm)	-	04	-
47J	0.625"	(15.9mm)	0.125"	(3.2mm)	-	04	20A
44A	0.750"	(19.1mm)	0.125"	(3.2mm)	-	01	-
44B	0.750"	(19.1mm)	0.125"	(3.2mm)	-	01	20A
44K	0.750"	(19.1mm)	0.125"	(3.2mm)	-	04	-
44L	0.750"	(19.1mm)	0.125"	(3.2mm)	-	04	20A
44AA	0.750"	(19.1mm)	0.125"	(3.2mm)	-	20	-
44AB	0.750"	(19.1mm)	0.125"	(3.2mm)	-	20	20A

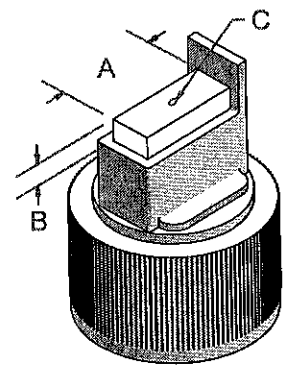

X

PRODUCT NUMBER	DIMENSION (A)		DIMENSION (B)		FELT TYPE	RESTRICTOR
32AA*	0.813"	(20.7mm)	0.125"	(3.2mm)	04	-
32AB*	0.813"	(20.7mm)	0.125"	(3.2mm)	04	20A
32X	0.875"	(22.2mm)	0.125"	(3.2mm)	01	-
32Y	0.875"	(22.2mm)	0.125"	(3.2mm)	01	20A
32CC	0.875"	(22.2mm)	0.125"	(3.2mm)	04	-
32CD	0.875"	(22.2mm)	0.125"	(3.2mm)	04	20A
32DE	0.875"	(22.2mm)	0.125"	(3.2mm)	04	(1)-20Q
32DF	0.875"	(22.2mm)	0.125"	(3.2mm)	04	(1)-20Q, (1)-20A
32BC	0.875"	(22.2mm)	0.125"	(3.2mm)	20	-
32BD	0.875"	(22.2mm)	0.125"	(3.2mm)	20	20A
32AV	0.953"	(24.2mm)	0.125"	(3.2mm)	04	-
32AW	0.953"	(24.2mm)	0.125"	(3.2mm)	04	20A
32BX	0.953"	(24.2mm)	0.125"	(3.2mm)	01	-
32BY	0.953"	(24.2mm)	0.125"	(3.2mm)	01	20A
32CA	0.953"	(24.2mm)	0.125"	(3.2mm)	20	(1)-20Q
32CB	0.953"	(24.2mm)	0.125"	(3.2mm)	20	(1)-20Q, (1)-20A



\* Guide Length is 0.250" (See page F for details)