

Power Supplies

24 V and 72 V




LinMot®




| Power Supplies | S01-24/500 | S01-72/500 | S01-72/1000 |
|-----------------------------------|--|--|--|
| Input | | | |
| Input voltage range | 90...132VAC / 180...264VAC automatical switchover | | AC 3 x 340-550V |
| Power frequency | 50/60Hz | | 50/60Hz |
| Efficiency | typ. 86% | typ. 88% | typ. 91,5% |
| Input current limitation | $\leq 70A_{peak}$ typ. cold, $\leq 150A_{peak}$ factory setting | | $< 35A_{peak}$ typ. cold, $< 70A_{peak}$ hot |
| Internal fuse | 16ATH/250VAC | | |
| External fuse | | | 16A (IEC), 20A (USA) required |
| Output | | | |
| Preset range Vo | 22 - 29VDC, factory setting 24VDC \pm 0.5% (Vo will be saved after 1s) | 54 - 80VDC, factory setting 72VDC \pm 0.5% (Vo will be saved after 1s) | 72V: 56 - 80VDC factory setting $V_{o,nom} \pm 0,15/0,2V$ |
| Max. Outputpower | 480W - Powerboost 720W at ($V_o \geq V_{o,nom}$) | | 1000W |
| Powerboost (only in Boostmode) | up to 150% (see chart) | | up to 190 - 210% (see chart) |
| Ripple | 120mV _{ss} typ. | | 72V: 40mV _{ss} typ. |
| Noise voltage (20MHz) | 200mV _{ss} typ. | | 200mV _{ss} typ. |
| Temperature coefficient | $\leq 0,025\% / K$ | | $\leq 0,025\% / K$ |
| Start-up delay | $< 1,5s$ (at 230VAC) | | 250 ms typ. |
| Rise time | 40 ms typ. | 80 ms typ. | 72V:20ms typ./155ms typ.at 50.000 μF load |
| Back feeding voltage | up to 35Vdc | up to 100 Vdc | up to 100 Vdc |
| Serial connection | yes (max. 2 identical power supplies) | | yes, max. 2 identical power supplies |
| Parallel connection | yes - only in parallel mode (max. 3 identical power supplies) | | yes, max. 3 identical power supplies |
| Regulation | | | |
| Line regulation | $< 0.2\%$ for Vo at $V_{i,min} - V_{i,max}$ | | $< 0.3\%$ for Vo at $V_{i,min} - V_{i,max}$ |
| Load regulation | $< 0.5\%$ for Vo at Io 0 - 100% Boost-M. $< 3.0\%$ for Vo at Io 0 - 100% Parallel-M. | | $< 0.5\%$ for Vo at Io 0 - 100% single operation $< 3\%$ for Vo at Io 0 - 100% parallel operat. |
| Response time | typ. 1ms at Io 20 - 80% | | typ. 1ms at Io 20 - 80% |
| Protection and Controlling | | | |
| Overtemperature protectio | Switches off if inside temperature becomes to high, reconnection with hysteresis | | Switches off if inside temperature becomes to high, reconnection with hysteresis |
| Safety/Standards | | | |
| | IEC60950 / UL60950 / UL508 / CSA22.2-60950 / CSA22.2-107.1 / IP20, safety class 1 / pollution degree 2 | | EN 60950-1 / IEC 60950-1 / VDE 0160 safety class I / VDE 0100 / IP20 / CSA-C22.2 No 107 / CSA-C22.2 No. 60950-1-03 / UL Std. 60950-1 / UL Std. 508 (Operation in Delta mains only for UL508) / SELV-output according EN60950-1 at 48V / pollution degree 2 |
| EMV | | | |
| Mains feedback / PFC | EN 61000-3-2 Class A only with ext. PFC 12mH/4,5A/230VAC | | |
| Flicker | EN 61000-3-3 | | EN 61000-3-3 |
| Interference immunity | EN 61000-6-2 Industrial generic standard | | EN 61000-6-2 |
| ESD | EN 61000-4-2 8/15kV | | EN 61000-4-2 8/15 kV |
| Electrical fields | EN 61000-4-3 noise level 10V/m (Krit. A) | | EN 61000-4-3 noise level 10V/m |
| Burst | EN 61000-4-4 4kV (Krit.A) | | Input: EN 61000-4-4 4kV / Output: EN 61000-4-4 2kV |
| Surge | EN 61000-4-5 4/2kV (Krit.A) | | Input: EN 61000-4-5 2/4kV / Output: EN 61000-4-5 0,5kV |
| HF Immunity | EN 61000-4-6 noise level 10V (Krit.A) | | EN 61000-4-6 noise level 10V |
| Voltage drop | EN 61000-4-11 | | EN 61000-4-11 |
| Interference emission | EN 61000-6-4 Industrial generic standard EN 55011 class B, Radiation depends on assembly | | EN 61000-6-3 / EN 61204-3 |
| Operating Data | | | |
| Temperature range | -25°C...70°C integral, temperature regulated fan, sucking in air from below | | -25...+70°C, integral, temperature controlled fan, air intake bottom-up (fan switched on/off in two steps dependent on temperature) |
| Derating | 3% / K ab +60°C | | 2% / K at +60°C |
| Weight | 1.0 kg | | 2.0 kg |
| Mechanics | | | |
| Assembly | All systems can be snapped onto a symmetrical 35mm DIN-rail according to EN 50022 with a diameter of 1 to 2.5 mm or directly be screwed onto the wall. | | All devices can be attached to a back wall using the mounting tabs. |

**CURRENT LIMITING CHARACTERISTICS (TYP.)
S01-24/500 AND S01-72/500**

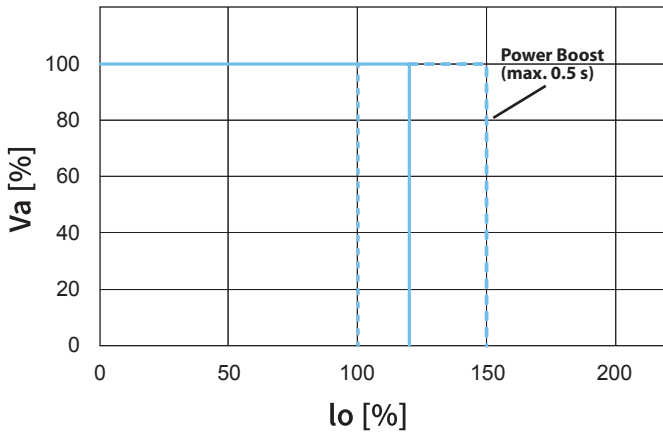


Up to 150% I_{nom} possible for 500ms, then the power boost is min. 500ms not available. (Indications for boost mode only).

CURRENT LIMITING CHARACTERISTICS (TYP.) S01-72/1000

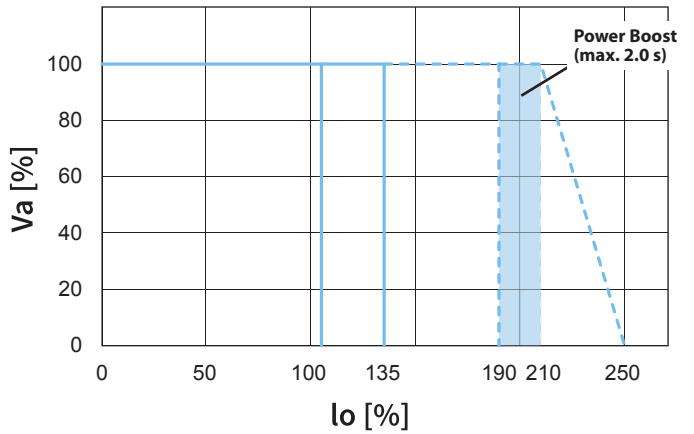


Start-up takes place with power boost between 190% and 210% of the nominal current for a period of approx. 2s. You can use power boost also in running operation.

DIMENSIONS S01-24/500 AND S01-72/500

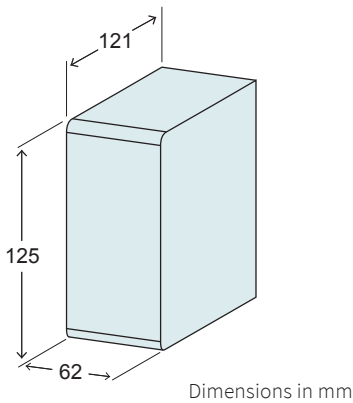

The distance between the surrounding components and the air admission and air exit holes should be at least 20 mm. Please ensure that exhaust air is not immediately sucked in again.

DIMENSIONS S01-72/1000

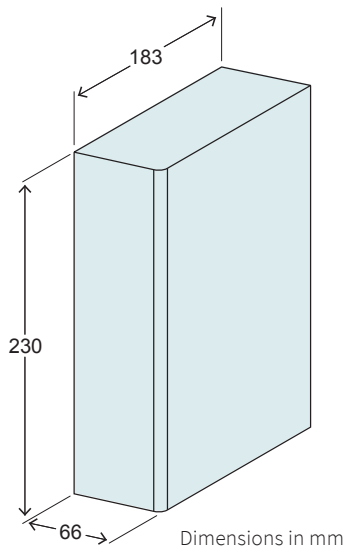

Operation in any assembly position possible. The distance between the surrounding components and the air admission and air exit holes should be at least 50 mm. Please ensure that exhaust air is not immediately sucked in again.

ORDERING INFORMATION

| Item | Description | Item-No. |
|-------------|-------------------------------------|---------------------------|
| S01-24/500 | Power Supply 24V/500W, 1x120/230VAC | 0150-2480 |
| S01-72/500 | Power Supply 72V/500W | 0150-1874 |
| S01-72/1000 | Power Supply 72V/1000W | 0150-1872 |