


# Termocoppia con guaina metallica Aisi 310

Thermocouple with Aisi 310 metal protection tube



Tolleranza termoelemento secondo la norma CEI EN 60584-1 Classe 1  
Tolerances thermoelement according to CEI EN 60584-1 Class 1  
Tolleranze dimensionali +/- 3% - Dimensional tolerances +/- 3%

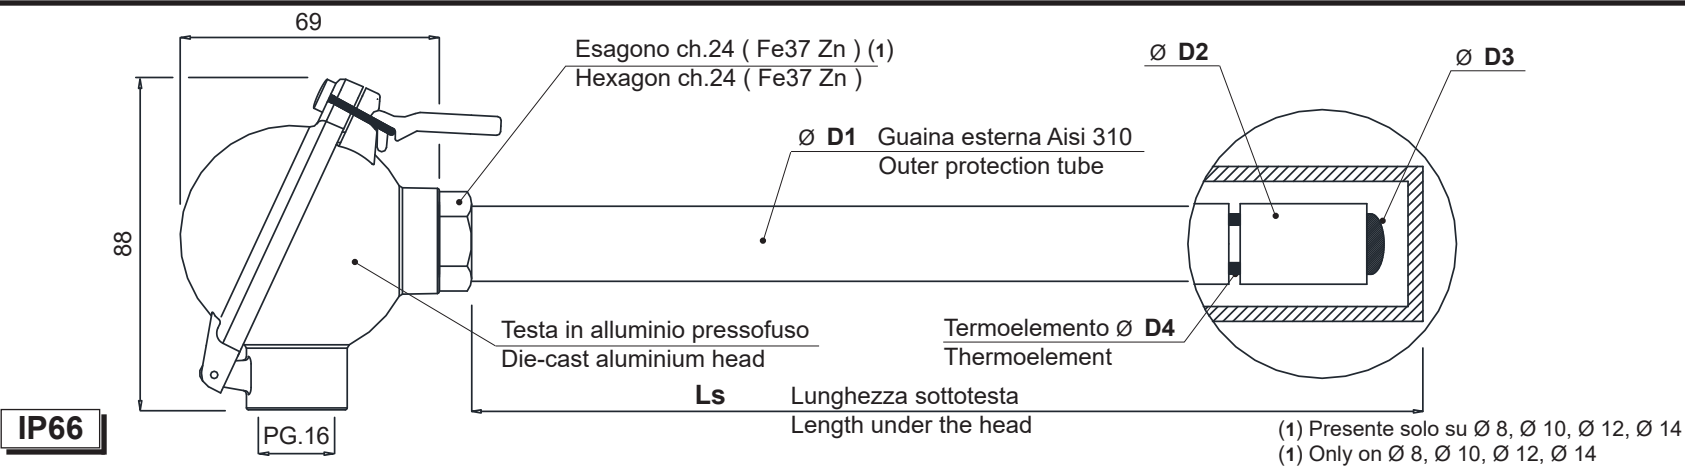

**IP66**

Lunghezza Ls Length	
01	50 mm
02	100 mm
03	150 mm
04	200 mm
05	250 mm
06	300 mm
07	350 mm
08	400 mm
09	450 mm
10	500 mm
11	550 mm
12	600 mm
13	650 mm
14	700 mm
15	750 mm
16	800 mm
17	850 mm
18	900 mm
19	950 mm
20	1000 mm
22	1100 mm
24	1200 mm
26	1300 mm
28	1400 mm
30	1500 mm
32	1600 mm
34	1700 mm
36	1800 mm
38	1900 mm
40	2000 mm
42	2100 mm
44	2200 mm
46	2300 mm
48	2400 mm
50	2500 mm
52	2600 mm
54	2700 mm
56	2800 mm
58	2900 mm
60	3000 mm


### T1 Massime temperature di lavoro consigliate °C / Advised maximum operating temperatures °C

Ø D4	Usa continuato / Continuous use					Usa intermittente / Intermittent use				
	Ø 0.80	Ø 1.29	Ø 1.63	Ø 2.30	Ø 3.26	Ø 0.80	Ø 1.29	Ø 1.63	Ø 2.30	Ø 3.26
<b>J ( Fe-Co )</b>	700	760	760	760	760	700	760	760	760	760
<b>K ( NiCr-Ni )</b>	800	900	940	990	1050	850	960	1000	1050	1080
<b>N ( Nicrosil-Nisil )</b>	900	1020	1050	1050	1050	940	1060	1080	1080	1080

### Diametro guaina esterna D1 (mm) / Outside sheath diameter

Ø D1	8 mm*	10 mm	12 mm	14 mm	17.2 mm	20 mm
Ø D4 Singolo/Single	0.80 mm	0.80 mm	1.29 mm	1.63 mm	3.26 mm	3.26 mm
Ø D4 Doppio/Double	0.80 mm	0.80 mm	1.29 mm	1.63 mm	2.30 mm	3.26 mm
	<b>08</b>	<b>10</b>	<b>12</b>	<b>14</b>	<b>17</b>	<b>20</b>

(\*) Disponibile solo in Inox aisi 316 / Available only Inox aisi 316

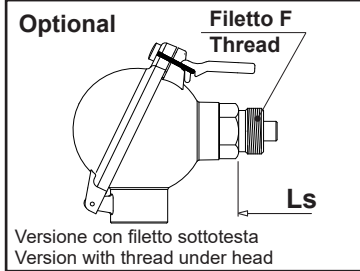

	1/4" gas ( Fe37 Zn )	3/8" gas ( Fe37 Zn )	1/2" gas ( Fe37 Zn )	1/2" gas ( Aisi 303 )
Ø 8	●	●	●	●
Ø 10	—	●	●	●
Ø 12	—	●	●	●
Ø 14	—	●	●	●
Ø 17.2	—	—	—	—
Ø 20	—	—	—	—
	<b>TA1480</b>	<b>TA1520</b>	<b>TA1560</b>	<b>TI1560</b>

Termoelemento / Thermoelement	
Singolo (2 fili) / Single	Doppio (4 fili) / Double
<b>1</b>	<b>2</b>

### Tipo termocoppia / Thermocouple type

J ( Fe-Co )	K ( NiCr-Ni )	N ( Nicrosil-Nisil )
Guaina/Sheath ( Inox aisi 316 )	Guaina/Sheath ( Inox aisi 310 )	Guaina/Sheath ( Inox aisi 310 )
<b>1</b>	<b>2</b>	<b>3</b>

**!** La termocoppia viene fornita priva di pressacavo (PG16).  
The thermocouple is supplied without core hitch (PG16).

**!** Esempio di ordine: Cod. **T2000.011.0808 + TA1480** termocoppia tipo "J", singolo termoelemento, guaina Ø 8 mm, lunghezza sottotesta 400 mm + opt. filetto 1/4"gas  
Ordering example: Cod. **T2000.011.0808 + TA1480** "J" type thermocouple, single thermoelement, sheath Ø 8 mm, length under the head 400 mm + opt. filetto 1/4"gas

Tutte le quote sono espresse in mm / All dimensions are in millimeters  
SETER s.r.l. Data: 01-08-2011 Revisione n°: 12 del 09-12-2019 Disegnato: 001 Approvato: 004



SETER s.r.l. Fiorano Modenese Modena Italy  
commerciale@seter.it www.seter.it  
tel. 0536-843454 fax 0536-927199

T 2 0 0 0 . 0 . . . . .