

JP-800.50 1/2", 50 l/min



Standard: II 3/3 GD c IIB T135 °C (EX Zone 2)
 Conduct: II 2/2 GD c IIB T135 °C (EX Zone 1)



JP-800.50 PP



PP



ALU



PVDF



Edelstahl
Stainless Steel

Technische Daten

Technical data

Druck-/Sauganschluss	Delivery/suction connection	G 1/2"
Luftanschluss	Air connection	G 3/8"
Max. Saughöhe trocken*	Max. dry suction lift*	5 m
Max. Förderleistung*	Max. flow rate*	50 l/min
Max. Förderhöhe*	Max. head*	70 m
Feststoffe	Solids	Ø max. 4 mm
Max. Betriebsdruck	Max. air supply pressure	7 bar
Werkstoff	Construction material	PP/PVDF/Alu/Edelstahl (SS)
Gewicht	Net weight	3,6/4,2/4,0/ 6,5 kg


* Abhängig vom Werkstoff

* Depending on construction material

Alle Gewinde sind Innengewinde
 All threads are female threads

Alle genannten Werte sind unverbindliche Richtwerte.
 All values shown are approximate and not binding.

Leistungskurve - Performance curve

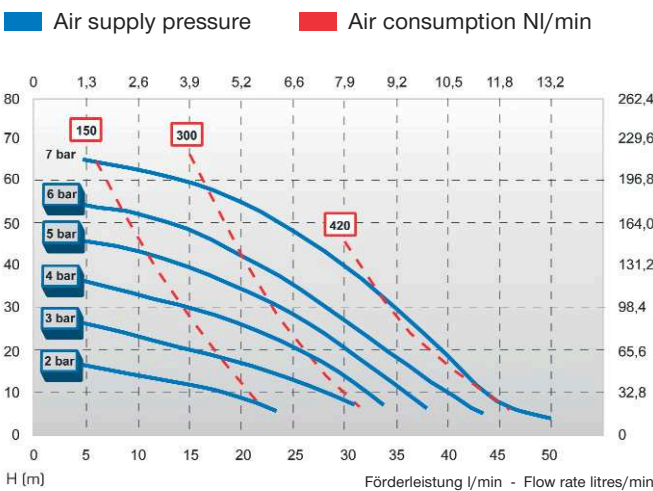

Abmessungen - Dimensions

