

Distributed by:

**JAMECO**<sup>®</sup>  
ELECTRONICS

**www.Jameco.com ♦ 1-800-831-4242**


The content and copyrights of the attached  
material are the property of its owner.

Jameco Part Number 1173940

ECN #	APPRVD.	DATE	REV.
/			

Ground Terminal  
# 8-32 Screw  
(2 Places)

Phoenix VDFK6  
(6 Places)

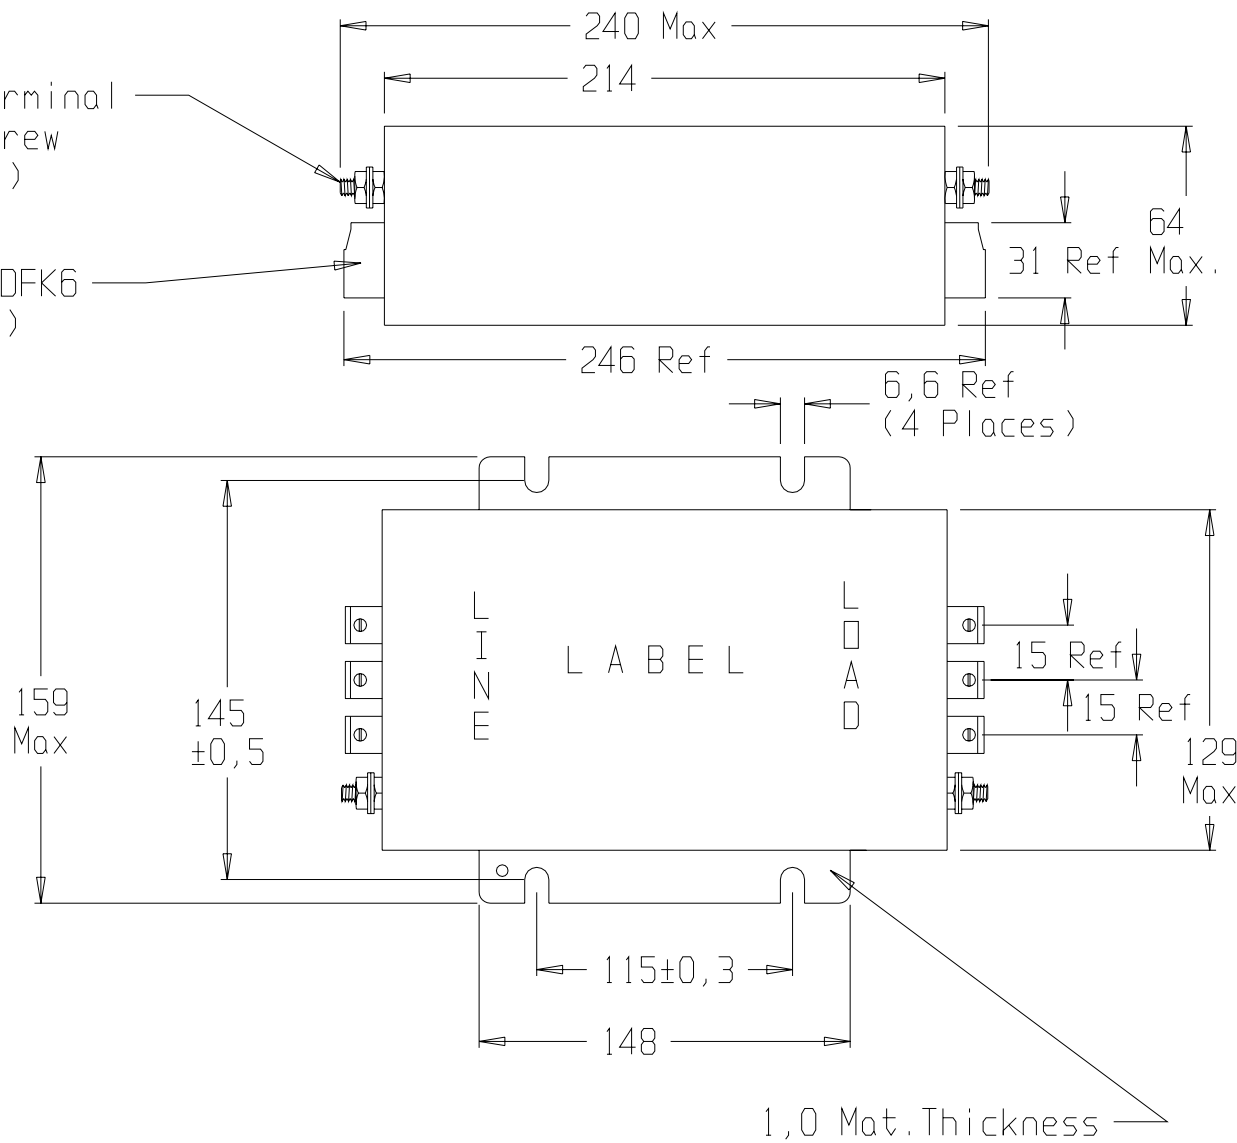

SPECIFICATION


50Amp /40°C 50-60Hz

440VAC Phase to Phase  
250VAC Phase to Neutral/Gnd

ATTENUATION


Comm.Mode - 66dBμV at 100kHz  
Dif.Mode - 80dBμV at 100kHz

EQUIVALENT SCHEMATIC MEASURED AT 1kHz

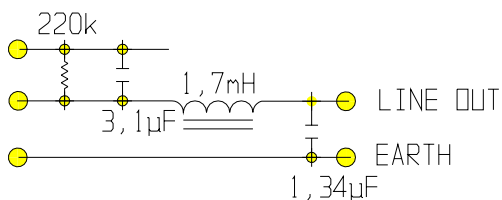

Max.Leakage current at 10% unsymmetrical mains, each Line to Ground:  
2,5mA at 120V 60Hz  
4,3mA at 250V 50Hz

THIRD ANGLE PROJECTION



This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM'S order or prior written consent.



RFI FILTER

CAD FILE:	cde\prt\cd\F7754		
SCALE:	.34	DATE:	2-17-96
DRW. BY:	MS	DRG:	MS
ORG. NO.			REV.
50FCD10			00